

Aerospace & Defense

Technology Solutions



About Systems Protection

Federal-Mogul Systems Protection (FMSP) is the world's foremost supplier of protective sleeving and shielding solutions for wires, hoses, and mechanical assemblies. Major industries served include automotive, aerospace and defense, as well as a host of industrial segments. With sales, manufacturing, and innovation centers located in the Americas, Europe and Asia, FMSP delivers the broadest, most innovative product portfolio to both original equipment and tier suppliers. FMSP is the proud manufacturer of Bentley-Harris® protection products.

About Federal-Mogul

Headquartered in Southfield, Michigan, Federal-Mogul Corporation is a leading global supplier of powertrain and safety technologies, serving the world's foremost original equipment manufacturers of automotive, light commercial, heavy-duty, agricultural, marine, rail, off-road and industrial vehicles, as well as the worldwide aftermarket. With locations in 35 countries, the company's leading technology and innovation, lean manufacturing expertise, as well as marketing and distribution deliver world-class products, brands and services.

Our Mission

To be recognized by our customers, on a worldwide basis, as the pre-eminent supplier of protection products, by providing excellent product value, outstanding customer service and innovative product solutions.



Powerful Solutions for Superior Aircraft Protection



ABRASION & BUNDLING



Product	Description	Temperature	Flammability	Halogen Free	Design and Construction	Available Sizes
 ROUNDIT® PPS	A lightweight, solution that provides abrasion protection in areas within close proximity to fluid lines or in space applications where low outgassing is required.	-60°C to +175°C (-76°F to +347°F)	• FAR Part 25 § 853	✓	Design: Wrappable Construction: Polyphenylene Sulfide (PPS)	5 to 38 mm (3/16" to 1-1/2")
 ROUNDIT® 2000 NX	A flexible solution that provides excellent abrasion and cut-through resistance; oil and water repellent. Qualified to ASD EN6049-006 and BMS 13-81 Type 1.	-60°C to +200°C (-76°F to +392°F)	• FAR Part 25 § 853	✓	Design: Wrappable Construction: Nomex® and PPS	5 to 40 mm (3/16" to 1-1/2")
 ROUNDIT® 2000 NX PTR/VTR	Designed with a pink tracer to identify fuel lines or a violet tracer to identify fiber optics, as well as an ivory tracer to indicate maximum operating diameter; oil and water repellent. Qualified to ASD EN6049-006.	-60°C to +200°C (-76°F to +392°F)	• FAR Part 25 § 853	✓	Design: Wrappable Construction: Nomex® and PPS	5 to 40 mm (3/16" to 1-1/2")
 ROUNDIT® 2000 NX Red / Orange	Designed to identify wire harnesses connected with test equipment taken on-board airplanes (Orange) or with weapon systems (Red); oil and water repellent. Qualified to ASD EN6049-006.	-60°C to +200°C (-76°F to +392°F)	• FAR Part 25 § 853	✓	Design: Wrappable Construction: Nomex® and PPS	5 to 40 mm (3/16" to 1-1/2")
 ROUNDIT® 2000 NX GRIP	Designed with a sewn loop textile attachment method which, in conjunction with an adhesive hook, enables attachment of the wire harness directly to the aircraft structure thus reducing the space needed between the wire harness and the structure.	-60°C to +200°C (-76°F to +392°F)	• FAR Part 25 § 853	✓	Design: Wrappable Construction: Nomex® and PPS	5 to 40 mm (3/16" to 1-1/2")
 Expando® HR Plus	Fray-resistant and flame retardant solution used for abrasion protection over a range of temperature environments.	-70°C to +150°C (-94°F to +302°F)	• FAR Part 25 § 853 • VV-1		Design: Tubular Construction: Halar®(E-CTFE) fluoropolymer	3 to 64 mm (1/8" to 2-1/2")
 Expando® 686 DM	Optimal solution for use where a combination of abrasion protection and lightweight properties are required.	-70°C to +200°C (-94°F to +392°F)	• FAR Part 25 § 853 • VV-1	✓	Design: Tubular Construction: PEEK & PPS	3 to 64 mm (1/8" to 2-1/2")
 Expando® PPS	Designed for mechanical protection in high temperature areas. Often used for its outstanding properties in extreme environments.	-70°C to +200°C (-94°F to +392°F)	• FAR Part 25 § 853 • VV-1	✓	Design: Tubular Construction: PPS	3 to 45 mm (1/8" to 1-3/4")
 Expando® HTNS-L/HO	Low flammability and resists damage from most chemicals. Features an open-braid construction, making the product highly flexible and resistant to trapping water, heat and humidity. Qualified to EN6049-003.	-60°C to +240°C (-76°F to +464°F)	• FAR Part 25 § 853 • VV-1	✓	Design: Tubular Construction: Nomex®	2 to 30 mm (1/16" to 1-3/16")
 Expando® PEEK	Designed for mechanical protection in temperature extremes and hostile conditions.	-70°C to +260°C (-94°F to +500°F)	• FAR Part 25 § 853	✓	Design: Tubular Construction: PEEK	3 to 64 mm (1/8" to 2-1/2")
 Expando® PFA	Self-extinguishing when used to encase typical non-flammable wires or cables, has low flammability and resists damage from most chemicals.	-70°C to +260°C (-94°F to +500°F)	• FAR Part 25 § 853		Design: Tubular Construction: PFA	3 to 32 mm (1/8" to 1-1/4")
 Silicone Tapes	Provide good fluid resistance and are ideal for sealing, connecting and finishing cut ends. Also available with fiberglass reinforcement for increased mechanical strength.	-60°C to +250°C (-76°F to +482°F)			Design: Flat Construction: Silicone	Maximum elongation ranges from 200% to 500%. Multiple widths and thicknesses available.
 Lacing Tapes	Flat braided textiles that feature outstanding chemical and thermal stability, are fray resistant and have a high breaking strength. TG series conforms to CID-A-A-52083 Finish D.	-55°C to +1100°C (-67°F to +2012°F)			Design: Flat Rectangular Construction: Available in Teflon-coated fiberglass, Nomex® or ceramic fibers	

ELECTRICAL INSULATION








Product	Description	Temperature	Flammability	Halogen Free	Design and Construction	Available Sizes
 Ben-Har® 1151 FR-B	A rugged, flame-retardant solution that provides both electrical insulation and abrasion resistance. Difficult to ignite and self-extinguishes promptly. Grade B qualified to DMS 2109.	-70°C to +200°C (-94°F to +392°F)	• FAR Part 25 § 853	✓	Design: Tubular Construction: Silicone Rubber Coated Fiberglass Sleeving	14 AWG through 3" (Grade B only)
 ROUNDIT® 2000 NX HT	A high temperature version of ROUNDIT® 2000 NX. Includes a wide ivory tracer on the outer side for identification purposes; oil and water repellent. Qualified to ASD EN6049-007.	-60°C to +260°C (-76°F to +500°F)	• FAR Part 25 § 853	✓	Design: Wrappable Construction: Nomex® and Polyetheretherketone (PEEK)	5 to 40 mm (3/16" to 1-1/2")

Powerful Solutions for Superior Aircraft Protection


THERMAL MANAGEMENT





Product	Description	Temperature	Flammability	Halogen Free	Design and Construction	Available Sizes
 Aerospace FyreJacket®	Protects components in extreme temperatures. Silicone rubber coating has excellent shedding properties; meets AS 1072.	-54°C to +260°C (-65°F to +500°F)	Withstands 15 min at +1100°C (+2012°F) when installed on AS 1055 hose assembly	✓	Design: Tubular. Also available in tape form (FyreTape®) Construction: Silicone outer layer and fiberglass inner layer	5 to 100 mm (1/4" to 4")
 ROUNDIT® Therm-A	Three layer design provides thermal/fire protection and excellent cut-through and abrasion resistance; oil and water repellent.	-60°C to +260°C (-76°F to +500°C)	Withstands 5 min at +1100°C (+2012°F) according to ISO 2685	✓	Design: Wrappable Construction: ROUNDIT® 2000 NX HT, silica and Panox®	10 to 32 mm (3/8" to 1-1/4")
 ROUNDIT® Therm-B	Two layer design provides increased thermal/fire protection and excellent cut-through and abrasion resistance; oil and water repellent.	-60°C to +260°C (-76°F to +500°C)	Withstands 15 min at +1100°C (+2012°F) according to ISO 2685	✓	Design: Wrappable Construction: ROUNDIT® 2000 NX HT and FyreTape®	10 to 32 mm (3/8" to 1-1/4")
 Therm-L-Wrap™ 66	Self-wrappable sleeve with an adhesive closure; offers excellent radiant heat protection and excellent EMI shielding performance	-60°C to +200°C (-76°F to +392°F)	• FAR Part 25 § 853	✓	Design: Wrappable Construction: Aluminum outer layer and fiberglass inner layer	10 to 25 mm 3/8" to 1"
 Therm-L-Gard™	Custom multilayer heat shielding system also shown to provide good EMI shielding performance	Based on construction; customized testing can be conducted to actual application specific heat environment.	• FAR Part 25 § 853	✓	Design: Application specific Construction: Fiberglass fabric with aluminum laminate	Custom parts may be slit to width and length or die cut into complex geometric shapes

ELECTROMAGNETIC SHIELDING




Product	Description	Temperature	Flammability	Halogen Free	Design and Construction	Available Sizes
 ROUNDIT® 2000 NX EMI	Provides mechanical/abrasion protection with outer layer and EMI shielding with inner layer; oil and water repellent.	-55°C to +200°C (-65°F to +392°F)	• FAR Part 25 § 853	✓ (Type A only)	Design: Wrappable Construction: Nickel-plated copper C27 according to ASTM B-355 combined with Nomex® multifilaments and PPS monofilaments; PTFE layer optional	6 to 38 mm (1/4" to 1-1/2")

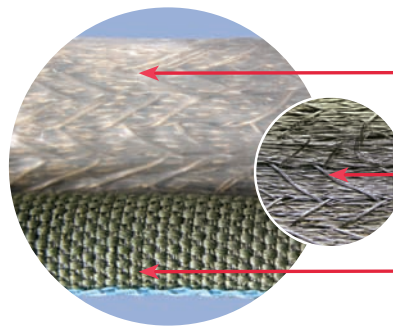
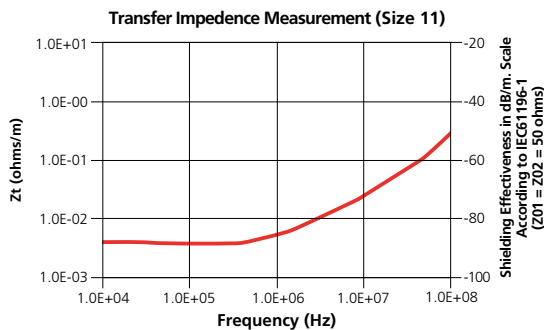


Optional PTFE inner layer provides protection of component from the metal

Braided nickel-plated copper wire provides EMI insulation


Nomex® & PPS construction with oil and water repellent treatment

 ROUNDIT® EMI FMJ	Self-wrapping metal solution with 95% optical coverage; flexible and easy to install providing very high performance EMI shielding	-65°C to +200°C (-85°F to +392°F)	• FAR Part 25 § 853	✓	Design: Wrappable Construction: Nickel-plated copper C4 according to ASTM B-355 combined with PPS monofilament	8 to 38 mm (5/16" to 1-1/2")
--	--	-----------------------------------	---------------------	---	---	------------------------------

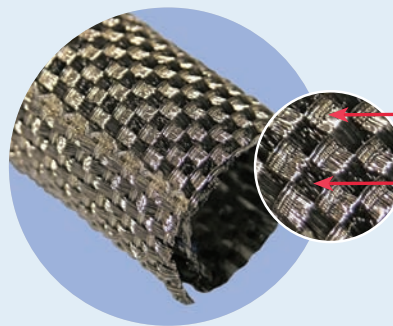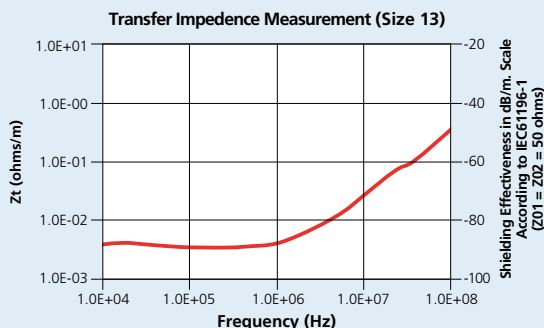

Nickel-plated copper strands are woven to provide high conductivity and ensure EMI shielding with a 95% optical coverage

PPS monofilaments ensure aerospace-grade temperature and a highly flexible assembly

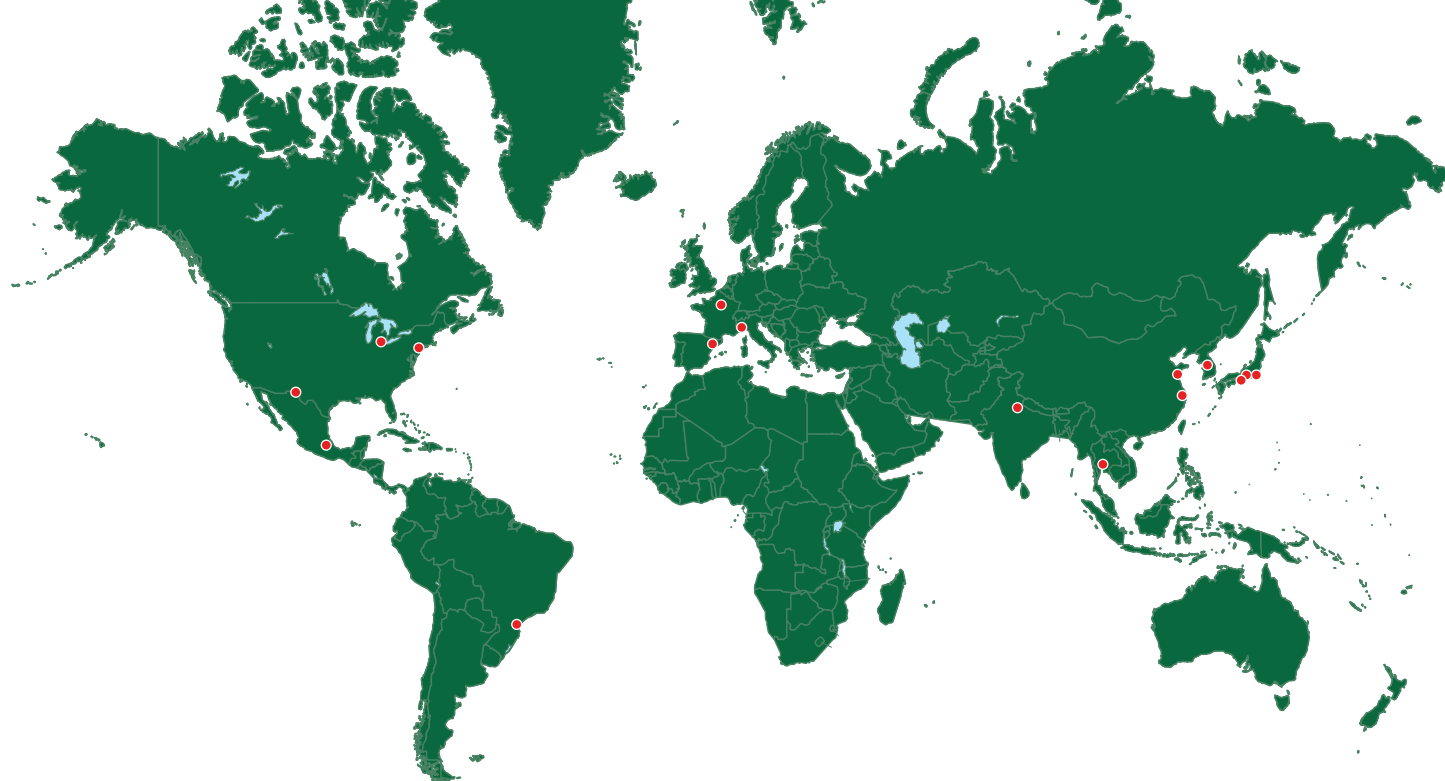

AMERICAS

United States

Innovation Center

241 Welsh Pool Road
 Exton, Pennsylvania 19341
 Toll Free: (00) 1.800.926.2472
 Phone: (00) 1.610.363.2600
 Fax: (00) 1.610.363.9660

Sales

44064 Plymouth Oaks Boulevard
 Plymouth, MI 48170
 Phone: (00) 1.734.254.1115
 Fax: (00) 1.734.254.1100

Manufacturing

1277 Joe Battle Boulevard
 El Paso, Texas 79936
 Toll Free: (00) 1.888.926.2489
 Phone: (00) 1.915.860.2300
 Fax: (00) 1.915.860.1243

Brazil

Sales & Manufacturing

Federal-Mogul Electrical do Brasil
 773 George Rexroth Street
 Diadema, Sao Paulo
 CEP 09951-270
 Phone: (55) 11 4070 6200
 Fax: (55) 11 4070 6204

Mexico

Sales

Calle Tejocotes S/N
 Col. Bo. Texcacoa
 Tepetzotlan
 Phone: (52) 555 100 1338

ASIA

Japan

Sales

Nagoya Center Plaza Building 8F
 5-1-5 Imaike Chikusa-ku
 Nagoya 464-0850
 Phone: (81) 52 744 5501
 Fax: (81) 52 744 5503

Manufacturing

2482-3 Inokuchi Nakai-machi
 Ashigara Kami-gun 259-0151
 Phone: (81) 465 27 3730
 Fax: (81) 465 80 3360

Sales

New City Arena Tower 15F
 3-1-9 Shin-Yokohama
 222-0033
 Phone: (81) 45 479 0201
 Fax: (81) 45 478 0441

China

Sales

Federal-Mogul (China) Co., Ltd
 No. 118, Jiqiao Road, Jinqiao, Pudong
 Shanghai 201206, China
 Phone: (86) 21 6182 7688
 Fax: (86) 21 6182 7390

Manufacturing

#269 Tonghe Road
 Qingdao Economic & Tech. Dev. Area
 Shandong Province, 266510

India

Sales

A 26/3, Mohan Cooperative Indus
 New Delhi
 Phone: (91) 11 41 497 818

Korea

Sales

7F, Taesuk Building
 275-5 Yangjae-dong, Seocho-ku
 Seoul, 137-943
 Phone: (82) 2 589 4551
 Fax: (82) 2 589 4555

Thailand

Sales & Manufacturing

1/89 Moo 5, Rojana Industrial Park
 Rojana Road
 Khanharm, Uthai Thani
 Ayuttaya, 13210
 Phone: (66) 35 226 060
 Fax: (66) 35 330 553

EUROPE

France

Sales & Manufacturing

69 Rue Henri Laroche
 B.P. 70216
 60802 Crépy-en-Valois Cedex
 Phone: (33) 3 44 39 06 06
 Fax: (33) 3 44 39 06 01

Italy

Sales

Via Reiss Romoli 122/11
 10148 Torino
 Phone: (39) 011 22 63 016
 Fax: (39) 011 22 63 016

Spain

Sales

C/Progres, 394
 Barcelona 08918
 Phone: (34) 93 460 24 70
 Fax: (34) 93 460 18 16